

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 143 612 A1

(12)

EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

(43) Date of publication:

10.10.2001 Bulletin 2001/41

(51) Int Cl.7: H03H 9/145

(21) Application number: 00962921.3

(86) International application number:

PCT/JP00/06703

(22) Date of filing: 28.09.2000

(87) International publication number:

WO 01/31782 (03.05.2001 Gazette 2001/18)

(84) Designated Contracting States:

DE FR GB

Designated Extension States:

AL LT LV MK RO SI

(72) Inventor: MITOBE, Seiichi 102, Kazama-Arms

Kanagawa 222-0013 (JP)

(30) Priority: 18.10.1999 JP 29474899

(74) Representative: HOFFMANN - EITLE

Patent- und Rechtsanwälte

Arabellastrasse 4

81925 München (DE)

(71) Applicant: KABUSHIKI KAISHA TOSHIBA

Kawasaki-shi, Kanagawa-ken 210-8572 (JP)

(54) SURFACE ACOUSTIC WAVE DEVICE

(57) There is provided an apparatus that shows a much better transmission function characteristic in a signal passing band, and a low insertion loss. A plurality of pairs of electrode fingers constitute a first split electrode group of 5a1, 5b1, 5a2, 5b2, 5a3, 5b3, Further, a plurality of pairs of electrode fingers constitute a second split electrode group of 6a1, 6b1, 6a2, 6b2, 6a3, 6b3,

.... The pairs of electrode fingers of both the groups are interleaved. The pairs of electrode fingers include electrode fingers of a width narrower than $\lambda/8$ (λ indicates the wavelength of a surface acoustic wave serving as the operation central frequency), and electrode fingers of a width wider than $\lambda/8$, and the distance between the centers of the adjacent electrode fingers differs from $\lambda/4$.

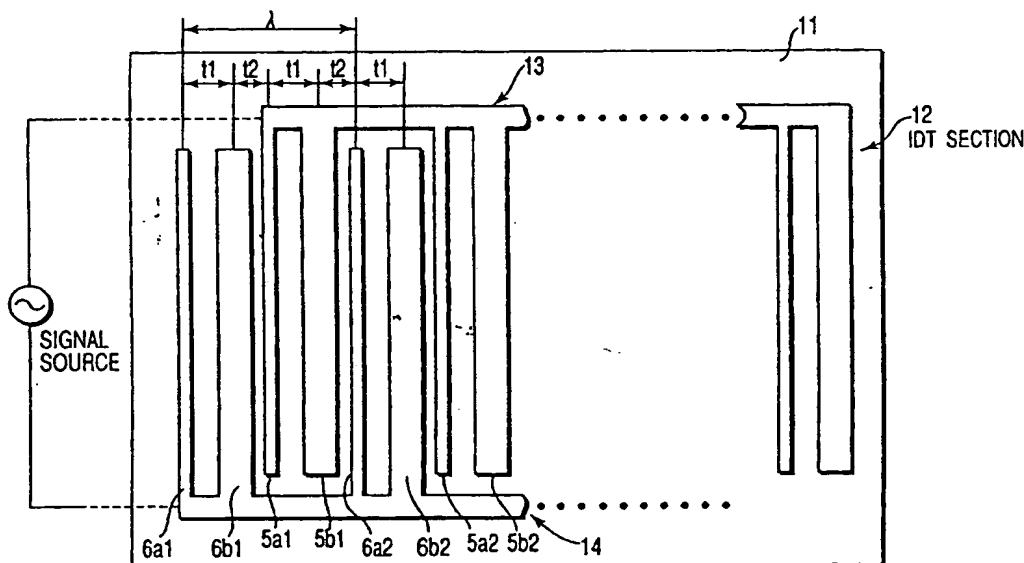


FIG. 2

Description

Technical Field

5 [0001] The present invention relates to a surface acoustic wave apparatus having an interdigital transducer formed on a piezoelectric substrate.

Background Art

10 [0002] A surface acoustic wave apparatus is mainly used as an intermediate frequency filter for electronic devices. These devices include television sets, communication devices, and cellular phones (of, for example, the CDMA system), etc. The surface acoustic wave apparatus is characterized in that it is compact and lightweight, and thus can be utilized to the full when utilized in a cellular phone.

15 [0003] Low loss, a narrow bandwidth and a steep cut-off frequency are demanded by the intermediate frequency filter for use in a cellular phone. As a filter serving as an intermediate frequency filter of this type, a surface acoustic wave apparatus having an interdigital transducer (IDT) as a main structural element has been developed.

[0004] In this surface acoustic wave apparatus, to meet the demands of narrow bandwidth and steep cut-off frequency characteristics, a piezoelectric substrate is used which is formed of a material, such as crystal, having characteristics of low fluctuation in oscillation irrespective of temperature changes.

20 [0005] In the surface acoustic wave apparatus, it is known that an internal reflected wave (a reflected acoustic wave, a reflected electric wave) occurs since the apparatus utilizes a mechanical vibration such as a surface acoustic wave (SAW). The internal reflected wave adversely influences the fundamental wave of the surface acoustic wave, thereby causing its amplitude attenuation or phase distortion, etc. To reduce the influence of the reflected wave upon the fundamental wave and to adjust the direction of transmission of the fundamental wave to a predetermined direction,
25 a technique for adjusting or trimming the width of an electrode finger in the IDT section of the surface acoustic wave apparatus has been developed. This technique is disclosed in, for example, Jpn. Pat. Appln. KOKAI Publication No. 54-17647.

[0006] In the disclosed apparatus, the adverse influence of the internal reflected wave upon the fundamental wave is not completely removed. In view of the transmission function characteristic of a signal passing band in the surface
30 acoustic wave apparatus, the adverse influence appears as a characteristic curve asymmetric with respect to the basic frequency at the center of the curve, or as a distorted characteristic curve.

[0007] A description will now be given of the phase relationship between the excited wave and the reflected wave in the surface acoustic wave apparatus, which the inventors of this invention have especially focused on.

35 [0008] FIGS. 1(A) and FIG. 1(C) show cross sections of essential parts of the surface acoustic wave apparatus. The electrode fingers of the surface acoustic wave apparatus include pairs of electrode fingers of a narrow width of $\lambda/16$, and pairs of electrode fingers of a wide width of $3\lambda/16$. Further, a plurality of pairs of electrode fingers projecting from a first common electrode and a plurality of pairs of electrode fingers projecting from a second common electrode are alternately arranged. The interval between each pair of adjacent electrode fingers is set at $\lambda/8$.

40 [0009] FIG. 1(B) shows the phase relationship between the excited wave and the internal reflected wave that advances to the left in the figure, while FIG. 1(D) shows the phase relationship between the excited wave and the internal reflected wave that advances to the right in the figure. Suppose that the phase of the excited wave is a reference value, and the clockwise direction with respect to the phase of the vector of the excited wave is the direction of a phase delay in the reflected wave.

45 [0010] Referring first to FIGS. 1(A) and 1(B), the relationship between the reflected wave that advances to the left in the figures, and the excited wave will be described.

[0011] Suppose that P1 represents any randomly-selected excitation point at which the surface acoustic wave is excited, A represents a reflected wave reflected from one EA of the edges of an electrode finger of a width ($\lambda/16$) closest to the excitation point, and B represents a reflected wave reflected from the other edge EB of the electrode finger. Further, suppose that C represents a wave from the excitation point as a reference point, which is passed through
50 the electrode finger closest to the excitation point, and reflected from one EC of the edges of an electrode finger of a width of $3\lambda/16$ adjacent to the first-mentioned electrode finger, and D represents a reflected wave reflected from the other edge ED of the second-mentioned electrode finger.

55 [0012] Concerning the reflected wave A, a phase delay element equal to a distance of 0.125λ with respect to the phase of the excited wave at the excitation point occurs, and hence a phase delay of 45° occurs with respect to the phase of the excited wave. In other words, supposing that a delay = X, $X = 45^\circ$ is given by the following equation:

$$((0.125/2) \times 2) \lambda : X = \lambda : 360^\circ \quad (\times 2) \text{ included in this equation indicates}$$

a coefficient for obtaining a double distance.

[0013] Further, concerning the reflected wave B, a phase delay element equal to a distance of $(0.125 + (1/8)) \lambda$ with respect to the phase of the excited wave at the excitation point P1 occurs, and phase inversion $((1/2)\lambda)$ occurs at the edge EB. Accordingly, a phase delay of 270° occurs with respect to the phase of the excited wave. In other words, supposing that a delay = X, $X = 360 \times (0.125 + (1/8) + (1/2)) = 270^\circ$ is given by

$$\{((0.125/2) \times 2) + ((1/16) \times 2) + (1/2)\} \lambda : X = \lambda : 360$$

($\times 2$) included in this equation indicates a coefficient for obtaining a double distance, and $(1/2)$ indicates the amount of phase inversion at the edge EB.

[0014] Concerning the reflected wave C, a phase delay element equal to a distance of $(0.125 + (1/8) + (1/4)) \lambda$ with respect to the phase of the excited wave at the excitation point P1 occurs, and hence a phase delay of 180° occurs with respect to the phase of the excited wave. In other words, supposing that a delay = X, $X = 360 \times (0.125 + (1/8) + (1/4)) = 180^\circ$ is given by

$$\{((0.125/2) \times 2) + ((1/16) \times 2) + ((1/8) \times 2)\} \lambda : X = \lambda : 360$$

($\times 2$) included in this equation indicates a coefficient for obtaining a double distance.

[0015] Concerning the reflected wave D, a phase delay element equal to a distance of $(0.125 + (1/8) + (1/4) + (3/8)) \lambda$ with respect to the phase of the excited wave at the excitation point P1 occurs, and phase inversion occurs at the edge ED. Accordingly, a phase delay of 135° occurs with respect to the phase of the excited wave. In other words, supposing that a delay = X, $X = 360 \times ((1/8) + (1/8) + (1/4) + (3/8) + (1/2)) = 495^\circ = 135^\circ$ is given by

$$\{((0.125/2) \times 2) + ((1/16) \times 2) + ((1/8) \times 2) + (3/16) \times 2 + (1/2)\} \lambda : X = \lambda : 360$$

($\times 2$) included in this equation indicates a coefficient for obtaining a double distance, and $(1/2)$ indicates the amount of phase inversion at the edge ED.

[0016] The result of synthesizing the vectors of the reflected waves A, B, C and D corresponds to the phase delay amount of the internal reflected wave relative to the excited wave. As shown in FIG. 1(B), the phase of the vector obtained by synthesizing the vectors of the internal reflected waves A, B, C and D is 157.5° . This value indicates that the phase is deviated by 22.5° from a phase (180°) in a direction in which the excited wave is offset.

[0017] The synthesized vector is obtained by synthesizing the x- and y-components of the vectors of the reflected waves A, B, C and D in the orthogonal coordinates.

[0018] Referring then to FIGS. 1(C) and 1(D), the relationship between the reflected wave that advances to the right in the figures and the excited wave will be explained.

[0019] Suppose that P2 represents any randomly-selected excitation point at which the surface acoustic wave is excited, E represents a reflected wave reflected from one EE of the edges of an electrode finger of a width $(3\lambda/16)$ closest to the excitation point, and F represents a reflected wave reflected from the other edge EF of the electrode finger. Further, suppose that G represents a wave from the excitation point as a reference point, which is passed through the electrode finger closest to the excitation point, and reflected from one EG of the edges of an electrode finger of a width of $\lambda/16$ adjacent to the first-mentioned electrode finger, and H represents a reflected wave reflected from the other edge EH of the second-mentioned electrode finger.

[0020] Concerning the reflected wave E, a phase delay element equal to a distance of 0.125λ with respect to the phase of the excited wave at the excitation point P2 occurs, and hence a phase delay of 45° occurs with respect to the phase of the excited wave.

[0021] Further, concerning the reflected wave F, a phase delay element equal to a distance of $(0.125 + (3/8)) \lambda$ with respect to the phase of the excited wave at the excitation point P2 occurs, and phase inversion occurs at the edge EF. Accordingly, a phase delay of 0° occurs with respect to the phase of the excited wave.

[0022] Concerning the reflected wave G, a phase delay element equal to a distance of $(0.125 + (3/8) + 0.25) \lambda$ with respect to the phase of the excited wave at the excitation point P2 occurs, and hence a phase delay of 270° occurs with respect to the phase of the excited wave.

[0023] Concerning the reflected wave H, a phase delay element equal to a distance of $(0.125 + (3/8) + 0.25 + (1/8)) \lambda$ with respect to the phase of the excited wave at the excitation point P2 occurs, and phase inversion occurs at the edge EH. Accordingly, a phase delay of 190° occurs with respect to the phase of the excited wave.

[0024] The above-described phase delays can be given by the same equations as used when explaining FIGS. 1

(A) and 1(B).

[0025] The result of synthesizing the vectors of the reflected waves E, F, G and H corresponds to the phase delay amount of the internal reflected wave relative to the excited wave. As shown in FIG. 1(D), the phase of the vector obtained by synthesizing the vectors of the internal reflected waves E, F, G and H is 22.5°. This value indicates that the phase is deviated by 22.5° from a phase (0°) in the same direction as that of the excited wave.

[0026] It is understood from the above-described results that the excited wave (fundamental wave) is not transmitted in a desired direction with a sufficiently high coefficient because of the influence of the reflected wave.

[0027] It is the object of the invention to provide a surface acoustic wave apparatus that shows a much better transmission function characteristic in its signal passing band, and a low insertion loss.

Disclosure of Invention

[0028] To attain the object, the following apparatus is provided:

(A) A surface acoustic wave apparatus equipped with an interdigital transducer that includes first and second common electrodes formed in parallel on a piezoelectric substrate, a first split electrode group connected to the first common electrode and extending toward the second common electrode, and a second split electrode group connected to the second common electrode and extending toward the first common electrode; characterized in that:

a plurality of pairs of electrode fingers that constitute the first split electrode group, and a plurality of pairs of electrode fingers that constitute the second split electrode group are interleaved at a cycle of $\lambda/2$; each pair of electrode fingers consist of a narrow-width electrode finger narrower than $\lambda/8$ (λ indicates a wavelength of a surface acoustic wave serving as an operation central frequency), and a wide-width electrode finger wider than $\lambda/8$; and

a synthesized vector, obtained by synthesizing vectors of waves reflected from electrode fingers that are included within a distance of $\lambda/2$ from any randomly-selected excitation point in a surface wave propagation direction, has a phase ϕ expressed by $n\pi - 5^\circ \leq \phi \leq n\pi + 5^\circ$ (n : a natural number) with respect to a phase of a wave excited by the interdigital transducer.

(B) The surface acoustic wave apparatus of the present invention described in item (A) has a structure in which a distance (t_1) between centers of a randomly-selected electrode finger and one of the electrode fingers located at the opposite sides of the randomly-selected electrode finger, differs from a distance (t_2) between centers of the randomly-selected electrode finger and the other of the electrode fingers located at the opposite sides of the randomly-selected electrode finger.

(C) The surface acoustic wave apparatus of the present invention described in item (A) is characterized in that said each pair of electrode fingers consist of a narrow-width electrode finger having a width of $\lambda/16$, and a wide-width electrode finger having a width w of $0.1465\lambda \leq w \leq 0.1605\lambda$.

(D) A surface acoustic wave apparatus according to another aspect of the present invention is characterized in that: a plurality of pairs of electrode fingers that constitute the first split electrode group, and a plurality of pairs of electrode fingers that constitute the second split electrode group are interleaved; each pair of electrode fingers consist of a narrow-width electrode finger narrower than $\lambda/8$ (λ indicates a wavelength of a surface acoustic wave serving as an operation central frequency), and a wide-width electrode finger wider than $\lambda/8$; a sum of the widths of the narrow-width electrode finger and the wide-width electrode finger is lower than $\lambda/4$; and a sum of the widths of the narrow-width electrode finger and the wide-width electrode finger and a distance between adjacent edges of these electrode fingers is $3\lambda/8$.

Brief Description of Drawings

[0029]

FIGS. 1A to 1D are views useful in explaining the operations and characteristics of a surface acoustic wave apparatus, to which the inventors of the present invention have paid attention;

FIG. 2 is a view illustrating a surface acoustic wave apparatus according to an embodiment of the present invention;

FIGS. 3A to 3D are views useful in explaining the principle of the operation of the surface acoustic wave apparatus shown in FIG. 2;

FIGS. 4A and 4B are views illustrating the frequency characteristics of the surface acoustic wave apparatus shown in FIG. 2;

FIG. 5 is a view illustrating a surface acoustic wave apparatus according to another embodiment of the present

invention;

FIGS. 6A to 6D are views useful in explaining the principle of the operation of the surface acoustic wave apparatus shown in FIG. 5; and

FIG. 7 is a graph illustrating the frequency characteristics of the surface acoustic wave apparatus shown in FIG. 5.

Best Mode for Carrying Out of the Invention

[0030] The embodiments of the present invention will be described with reference to the accompanying drawings.

[0031] In FIG. 2, reference numeral 1 denotes a piezoelectric substrate made of crystal, on one surface of which an interdigital transducer section 12 is formed.

[0032] In the interdigital transducer section 12, a first common electrode 13 and a second common electrode 14 are arranged parallel to each other with a space interposed therebetween. The first common electrode 13 is connected to a first split electrode group (electrode fingers 5a1, 5b1, 5a2, 5b2, 5a3, 5b3, ...)

[0033] extending toward the second common electrode 14. Further, the second common electrode 14 is connected to a second split electrode group (electrode fingers 6a1, 6b1, 6a2, 6b2, 6a3, 6b3, ...) extending toward the first common electrode 13.

[0034] In the first split electrode group, pairs of narrow-width electrode fingers (with suffix a) and wide-width electrode fingers (with suffix b) are arranged repeatedly with a certain interval between adjacent pairs. Also in the second split electrode group, pairs of narrow-width electrode fingers (with suffix a) and wide-width electrode fingers (with suffix b) are arranged repeatedly with a certain interval between adjacent pairs.

[0035] The pairs of electrode fingers (5a1, 5b1), (5a2, 5b2), (5a3, 5b3), included in the first split electrode group and the pairs of electrode fingers (6a1, 6b1), (6a2, 6b2), (6a3, 6b3), included in the second split electrode group are interleaved. When viewing the entire structure, the narrow-width electrode fingers and the wide-width electrode fingers are alternately arranged.

[0036] The common electrodes 13 and 14 and the split electrode groups are formed of electrode films containing aluminum (Al) or an aluminum (Al) alloy as a main component.

[0037] Further, in this embodiment, each pair of electrode fingers consist of an electrode finger 5b1, 5b2, 5b3, ..., 6a1, 6a2, 6a3, ..., which has a width narrower than $\lambda/8$ (λ indicates the wavelength of a surface acoustic wave serving as the operation central frequency), and an electrode finger 5a1, 5a2, 5a3, ..., 6b1, 6b2, 6b3, ..., which has a width wider than or equal to $\lambda/8$. More specifically, in this embodiment, the narrow-width electrode fingers have a width of $\lambda/16$, while the wide-width electrode fingers have a width of $3\lambda/16$.

[0038] Distances t1, t2, t1, t2, each between the centers of each pair of adjacent electrode fingers differ from $\lambda/4$ (which is a reference value in this embodiment). The distance t1 between the centers is a positive deviation from the reference value (i.e. higher than the reference value), while the distance t2 between the centers is a negative deviation from the reference value (i.e. lower than the reference value). The distances t1 and t2 are alternately arranged.

[0039] Specifically, the centers of adjacent electrode fingers are arranged with alternate distances interposed therebetween, which have positive and negative deviations from the reference value of $\lambda/4$. These deviations adjust the phase delays of the reflected wave in the IDT with respect to the excited wave. As will be described later, this adjustment enables the direction of advance of the internal reflected wave to be changed to a direction optimal for the advance direction of the fundamental wave of the surface acoustic wave.

[0040] In this embodiment, the following equations are established:

$$t1 = ((0.152 + (1/8)) \lambda$$

$$t2 = ((0.098 + (1/8)) \lambda$$

$$t1 + t2 = \lambda/2$$

where 0.152λ and 0.098λ represent distances between the opposed edges of the electrode fingers, while $\lambda/8$ represents the sum of half the width of each electrode finger included in each pair. Accordingly, the distance between the centers of the electrode fingers located at the opposite sides of any randomly-selected electrode finger is $\lambda/2$.

[0041] As a result of the research made by the inventors, the distances t1 and t2 between the centers of the electrode fingers were found to be values that enable the fundamental wave of the surface acoustic wave to be guided in an optimal direction. The method of determining the values of t1 and t2 can be expressed by the following general equations.

[0042] Supposing that the width of one of each pair of electrode fingers is w , the width of the other electrode finger is $((\lambda/4) - w)$, and the distance between the centers of these two electrode fingers is x_1 , x_1 is set at a value that substantially satisfies the following equation:

$$\tan \{k(x_1 - (\lambda/8))\} = 1/\cos \{k((3\lambda/4) + 2w)\}$$

(k represents the number of waves; $k = 2\pi/\lambda$)

[0043] When x_1 satisfies the equation, the fundamental wave of the surface acoustic wave can have an optimal directional property.

[0044] Where one electrode finger has a width of $\lambda/16$, and the other electrode finger has a width of $3\lambda/16$, it is sufficient if the distance x_2 between the centers of these electrode fingers is set at a value that substantially satisfies the following equation:

$$\tan \{k(x_2 - \lambda/8)\} = \sqrt{2}$$

[0045] Referring now to FIGS. 3(A) to 3(D), a description will be given of the phase relationship between the internal reflected waves and the excited wave (fundamental wave) in the surface acoustic wave apparatus of this embodiment.

[0046] FIGS. 3(A) and 3(C) are sectional views illustrating essential parts of the surface acoustic wave apparatus of FIG. 2. FIG. 3(B) is a view illustrating the phase relationship between the excited wave and the internal reflected wave that advances to the left in the figure. FIG. 3(D) is a view illustrating the phase relationship between the excited wave and the internal reflected wave that advances to the right in the figure. In the figures, suppose that the phase of the excited wave is a reference value, and the clockwise direction with respect to the phase of the vector of the excited wave is the direction of a phase delay in the reflected wave.

[0047] Referring first to FIGS. 3(A) and 3(B), a description will be given of the relationship between the excited wave and the reflected wave that advances to the left in the figures.

[0048] Suppose that P1 represents any randomly-selected excitation point at which the surface acoustic wave is excited, A represents a reflected wave reflected from one EA of the edges of an electrode finger of a width $(\lambda/16)$ closest to the excitation point, and B represents a reflected wave reflected from the other edge EB of the electrode finger. Further, suppose that C represents a wave from the excitation point as a reference point, which is passed through the electrode finger closest to the excitation point, and reflected from one EC of the edges of an electrode finger of a width of $3\lambda/16$ adjacent to the first-mentioned electrode finger, and D represents a reflected wave reflected from the other edge ED of the second-mentioned electrode finger.

[0049] Concerning the reflected wave A, a phase delay element equal to a distance of 0.098λ with respect to the phase of the excited wave at the excitation point occurs, and hence a phase delay of 35.28° occurs with respect to the phase of the excited wave. In other words, supposing that a delay = X , $X = 35.28^\circ$ is given by the following equation:

$$((0.098/2) \times 2) \lambda : X = \lambda : 360^\circ$$

($\times 2$) included in this equation indicates a coefficient for obtaining a double distance.

[0050] Further, concerning the reflected wave B, a phase delay element equal to a distance of $(0.098 + (1/8))\lambda$ with respect to the phase of the excited wave at the excitation point P1 occurs, and phase inversion $((1/2)\lambda)$ occurs at the edge EB. Accordingly, a phase delay of 260.28° occurs with respect to the phase of the excited wave. In other words, supposing that a delay = X , $X = 360 \times (0.098 + (1/8) + (1/2)) = 260.28^\circ$ is given by

$$\{((0.098/2) \times 2) + ((1/16) \times 2) + (1/2)\} \lambda : X = \lambda : 360$$

($\times 2$) included in this equation indicates a coefficient for obtaining a double distance, and $(1/2)$ indicates the amount of phase inversion at the edge EB.

[0051] Concerning the reflected wave C, a phase delay element equal to a distance of $(0.098 + (1/8) + 0.304)\lambda$ with respect to the phase of the excited wave at the excitation point P1 occurs, and hence a phase delay of 189.72° occurs with respect to the phase of the excited wave. In other words, supposing that a delay = X , $X = 360 \times (0.098 + (1/8) + 0.304) = 189.72^\circ$ is given by

$$\{((0.098/2) \times 2) + ((1/16) \times 2) + (0.152 \times 2)\} \lambda : X = \lambda : 360$$

($\times 2$) included in this equation indicates a coefficient for obtaining a double distance.

[0052] Concerning the reflected wave D, a phase delay element equal to a distance of $(0.098 + (1/8) + 3/8) \lambda$ with respect to the phase of the excited wave at the excitation point P1 occurs, and phase inversion occurs at the edge ED. Accordingly, a phase delay of 144.72° occurs with respect to the phase of the excited wave. In other words, supposing that a delay = X, $X = 360 \times ((0.098 + (1/8) + 0.304 + (3/8) + (1/2))) = 504.72^\circ = 144.72^\circ$ is given by

$$\{((0.098/2) \times 2) + ((1/16) \times 2) + (0.152 \times 2) + (3/16) \times 2 + (1/2)\} \lambda : X = \lambda : 360$$

($\times 2$) included in this equation indicates a coefficient for obtaining a double distance, and (1/2) indicates the amount of phase inversion at the edge ED.

[0053] The result of synthesizing the vectors of the reflected waves A, B, C and D corresponds to the phase delay amount of the internal reflected wave relative to the excited wave. As shown in FIG. 3(B), the phase of the vector obtained by synthesizing the vectors of the internal reflected waves A, B, C and D is 179.97° .

[0054] This value indicates that the phase is substantially an opposition to the phase of the excited wave.

[0055] The synthesized vector is obtained by synthesizing the x- and y-components of the vectors of the reflected waves A, B, C and D in the orthogonal coordinates.

[0056] Referring then to FIGS. 3(C) and 3(D), the relationship between the reflected wave that advances to the right in the figures and the excited wave will be described.

[0057] Suppose that P2 represents any randomly-selected excitation point at which the surface acoustic wave is excited, E represents a reflected wave reflected from one EE of the edges of an electrode finger of a width $(3\lambda/16)$ closest to the excitation point, and F represents a reflected wave reflected from the other edge EF of the electrode finger. Further, suppose that G represents a wave from the excitation point as a reference point, which is passed through the electrode finger closest to the excitation point, and reflected from one EG of the edges of an electrode finger of a width of $\lambda/16$ adjacent to the first-mentioned electrode finger, and H represents a reflected wave reflected from the other edge EH of the second-mentioned electrode finger.

[0058] Concerning the reflected wave E, a phase delay element equal to a distance of 0.098λ with respect to the phase of the excited wave at the excitation point P2 occurs, and hence a phase delay of 35.28° occurs with respect to the phase of the excited wave.

[0059] Further, concerning the reflected wave F, a phase delay element equal to a distance of $(0.098 + (3/8)) \lambda$ with respect to the phase of the excited wave at the excitation point P2 occurs, and phase inversion occurs at the edge EF. Accordingly, a phase delay of 350.28° occurs with respect to the phase of the excited wave.

[0060] Concerning the reflected wave G, a phase delay element equal to a distance of $(0.098 + (3/8) + 0.304) \lambda$ with respect to the phase of the excited wave at the excitation point P2 occurs, and hence a phase delay of 279.72° occurs with respect to the phase of the excited wave.

[0061] Concerning the reflected wave H, a phase delay element equal to a distance of $(0.098 + (3/8) + 0.304 + (1/8)) \lambda$ with respect to the phase of the excited wave at the excitation point P2 occurs, and phase inversion occurs at the edge EH. Accordingly, a phase delay of 144.72° occurs with respect to the phase of the excited wave.

[0062] The above-described phase delays can be given by the same equations as used when explaining FIGS. 3(A) and 3(B).

[0063] The result of synthesizing the vectors of the reflected waves E, F, G and H corresponds to the phase delay amount of the internal reflected wave relative to the excited wave. As shown in FIG. 3(D), the phase of the vector obtained by synthesizing the vectors of the internal reflected waves E, F, G and H is $+0.03^\circ$. This value indicates that the phase is substantially equal to that of the excited wave.

[0064] In the above-described invention, pairs of electrode fingers, each pair consisting of an electrode finger of a width narrower than $\lambda/8$ and an electrode finger of a width wider than $\lambda/8$, are provided for each of the common electrodes 13 and 14. The pairs of electrode fingers provided for the common electrode 13 are included in a first group, while the pairs of electrode fingers provided for the common electrode 14 are included in a second group. The pairs of electrodes included in the first and second groups are interleaved.

[0065] As a result, when viewing the entire structure, the electrode fingers of a width narrower than $\lambda/8$ and the electrode fingers of a width wider than $\lambda/8$ are alternately arranged. More specifically, in the above-described invention, an electrode finger with a width of $\lambda/16$ and an electrode finger with a width of $3\lambda/16$ constitute each pair. The vector characteristics shown in FIGS. 3(B) and 3(D) are obtained by selecting the interval between each pair of electrode fingers.

[0066] As understood from the vector characteristics shown in FIGS. 3(B) and 3(D), in the above embodiment, the

direction of the synthesized vector falls within the range of $n\pi \pm 0.03^\circ$ with respect to the ideal direction of propagation of the surface acoustic wave, where n is a natural number, and is an even number (including 0) when the excited wave and the reflected wave have the same phase, and an odd number when they have opposite phases.

[0067] This invention, however, is not limited to the above-mentioned values.

[0068] In the above embodiment, the position of one of each pair of electrode fingers with widths of $\lambda/16$ and $3\lambda/16$ is selected (by, for example, shifting the electrode finger with the width of $3\lambda/16$), thereby finally selecting the electrode intervals of 0.098λ and 0.152λ . As a result, the direction of the synthesized vector of the reflected waves falls within the range of $\pm 0.03^\circ$ with respect to the ideal direction of propagation of the surface acoustic wave.

[0069] However, a sufficient effect can be obtained even if the direction of the synthesized vector of the reflected waves falls within the range of $\pm 5^\circ$ with respect to the ideal direction of propagation of the surface acoustic wave.

[0070] In this case, it is sufficient if the electrode intervals are selected to be within each of the ranges of $0.152\lambda \pm 0.007\lambda$ and $0.098\lambda \mp 0.007\lambda$ (the \pm and \mp signs indicate that when the former assumes $+$, the latter assumes $-$, and vice versa) by shifting the position of one of each pair of electrode fingers with widths of $\lambda/16$ and $3\lambda/16$.

[0071] FIG. 4(A) shows measurement results concerning the transfer characteristic and the group delay characteristic of the above-described surface acoustic wave apparatus, obtained by matching the surface acoustic wave apparatus with an external circuit. As is understood from this characteristic figure, both the transfer characteristic and the group delay characteristic are substantially symmetrical with respect to the fundamental frequency f_0 .

[0072] FIG. 4(B) shows a state in which a surface acoustic wave apparatus, to which the invention is applied, is matched with an external circuit. The entire surface acoustic wave apparatus FA actually comprises a transducer, as shown in FIG. 2, for generating a surface acoustic wave, and another transducer for receiving the propagated surface acoustic wave and converting its oscillation into an electrical signal.

[0073] The external matching circuit comprises respective elements connected to the input and output sides of the surface acoustic wave apparatus. At the input side, there are provided an inductor L12 connected to a signal input terminal and a ground connection terminal, and a capacitor C11 having one terminal thereof connected to the signal input terminal. At the output side, there are provided an inductor L22 connected to a signal output terminal and the ground connection terminal, and a capacitor C21 having one terminal thereof connected to the signal output terminal. Although this example employs a matching circuit formed of L and C, another means may be used in which matching is performed by adjusting the impedance of the surface acoustic wave apparatus.

[0074] In the above-described embodiment, the distances t_1 and t_2 between the centers of adjacent electrode fingers are accurately determined in order to impart an optimal transfer directional property to the fundamental wave of the surface acoustic wave. However, the present invention is not limited to this. It is a matter of course that a deviation imparted to t_1 or t_2 may be increased or reduced in accordance with the properties demanded by the surface acoustic wave apparatus.

[0075] In the above-described embodiment, the interval between an electrode finger with the width of $\lambda/16$ and an electrode finger located at the left side thereof in the figure is set narrower than that between an electrode finger with the width of $\lambda/16$ and an electrode finger located at the right side thereof in the figure. However, the invention is not limited to this. When using a piezoelectric substrate having a propagation characteristic different from that of the above-described piezoelectric substrate, it is possible that the positional relationship between the narrower interval and the wider interval will be opposite.

[0076] The present invention is not limited to the above-described embodiment.

[0077] FIG. 5 illustrates another embodiment of the present invention.

[0078] Reference numeral 11 denotes a piezoelectric substrate made of crystal, on one surface of which an interdigital transducer section 12 is formed.

[0079] In the interdigital transducer section 12, a first common electrode 23 and a second common electrode 24 are arranged parallel to each other with a space interposed therebetween. The first common electrode 23 is connected to a first split electrode group (electrode fingers 3a1, 3b1, 3a2, 3b2, 3a3, 3b3, ...) extending toward the second common electrode 24. Further, the second common electrode 14 is connected to a second split electrode group (electrode fingers 4a1, 4b1, 4a2, 4b2, 4a3, 4b3, ...) extending toward the first common electrode 13. The electrode fingers 4a2, 4b2, 4a3, 4b3, are not shown.

[0080] In the first split electrode group, pairs of narrow-width electrode fingers (with suffix a) and wide-width electrode fingers (with suffix b) are arranged repeatedly with a certain interval between adjacent pairs. The cycle of the repetition is λ . Also in the second split electrode group, pairs of narrow-width electrode fingers (with suffix a) and wide-width electrode fingers (with suffix b) are arranged repeatedly with a certain interval between adjacent pairs. The cycle of the repetition is λ .

[0081] The pairs of electrode fingers (3a1, 3b1), (3a2, 3b2), (3a3, 3b3), included in the first split electrode group and the pairs of electrode fingers (4a1, 4b1), (4a2, 4b2), (4a3, 4b3), included in the second split electrode group are interleaved. When viewing the entire structure, the narrow-width electrode fingers and the wide-width electrode fingers are alternately arranged.

[0082] The common electrodes 13 and 14 and the split electrode groups are formed of electrode films containing aluminum (Al) or an aluminum (Al) alloy as a main component.

[0083] Further, in this embodiment, each pair of electrode fingers consist of an electrode finger 3b1, 3b2, 3b3, ..., 4a1, 4a2, 4a3, ..., which has a width narrower than $\lambda/8$ (λ indicates the wavelength of a surface acoustic wave serving as the operation central frequency), and an electrode finger 3a1, 3a2, 3a3, ..., 4b1, 4b2, 4b3, ..., which has a width wider than $\lambda/8$.

[0084] More specifically, in this embodiment, the width W1 of the narrow-width electrode fingers is $\lambda/16$, while the width W2 of the wide-width electrode fingers is 0.1535λ .

[0085] Supposing, in this embodiment, that the width of the electrode fingers, which have a width narrower than a reference value ($\lambda/8$), is W1, and that of the electrode fingers, which have a width wider than a reference value ($\lambda/8$), is W2, the widths W1 and W2 are set at values that substantially satisfy the following equation:

$$\cos(k \cdot 2W2) + \sin(k \cdot 2W2) = 2 - \cos(k \cdot 2W1) - \sin(k \cdot 2W1)$$

(k represents the number of waves; $k = 2\pi/\lambda$)

[0086] The inventors of the present invention found as a result of research that when this equation is satisfied, the fundamental wave of the surface acoustic wave can have an optimal directional property.

[0087] In the previous embodiment, the IDT is designed such that each pair of electrode fingers have respective widths of $\lambda/16$ and $3\lambda/16$.

[0088] In this embodiment, however, the sum of the widths of each pair of electrode fingers differs from $\lambda/4$, and the width of the wider electrode fingers is determined on the basis of the above equation.

[0089] Referring now to FIGS. 6(A) to 6(D), a description will be given of the phase relationship between the internal reflected waves and the excited wave (fundamental wave) in the surface acoustic wave apparatus of this embodiment.

[0090] FIGS. 6(A) and 6(C) are sectional views illustrating essential parts of the surface acoustic wave apparatus of FIG. 5. FIG. 6(B) is a view illustrating the phase relationship between the excited wave and the internal reflected wave that advances to the left in the figure. FIG. 6(D) is a view illustrating the phase relationship between the excited wave and the internal reflected wave that advances to the right in the figure. In the figures, suppose that the phase of the excited wave is a reference value, and the clockwise direction with respect to the phase of the vector of the excited wave is the direction of a phase delay in the reflected wave.

[0091] Referring first to FIGS. 6(A) and 6(B), a description will be given of the relationship between the excited wave and the reflected wave that advances to the left in the figures.

[0092] Suppose that P1 represents any randomly-selected excitation point at which the surface acoustic wave is excited, A represents a reflected wave reflected from one EA of the edges of an electrode finger of a width ($\lambda/16$) closest to the excitation point, and B represents a reflected wave reflected from the other edge EB of the electrode finger. Further, suppose that C represents a wave from the excitation point as a reference point, which is passed through the electrode finger closest to the excitation point, and reflected from one EC of the edges of an electrode finger of a width of 0.1535λ adjacent to the first-mentioned electrode finger, and D represents a reflected wave reflected from the other edge ED of the second-mentioned electrode finger.

[0093] Concerning the reflected wave A, a phase delay element equal to a distance of $(\lambda/16) \times 2$ with respect to the phase of the excited wave at the excitation point occurs, and hence a phase delay of 45° occurs with respect to the phase of the excited wave.

[0094] Further, concerning the reflected wave B, a phase delay element equal to a distance of $\{(\lambda/16) \times 2 + (\lambda/16) \times 2\}$ with respect to the phase of the excited wave at the excitation point P1 occurs, and phase inversion occurs at the edge EB. Accordingly, a phase delay of 270° , i.e. (-90°) , occurs with respect to the phase of the excited wave.

[0095] Concerning the reflected wave C, a phase delay element equal to a distance of $\{(1/16) \times 2 + (1/16) \times 2 + 0.159 \times 2\} \lambda$ with respect to the phase of the excited wave at the excitation point P1 occurs, and hence a phase delay of 204.48° occurs with respect to the phase of the excited wave.

[0096] Concerning the reflected wave D, a phase delay element equal to a distance of $\{(1/8) + (1/8) + 0.318 + 0.307\} \lambda$ with respect to the phase of the excited wave at the excitation point P1 occurs, and phase inversion occurs at the edge ED. Accordingly, a phase delay of 135° occurs with respect to the phase of the excited wave.

[0097] The result of synthesizing the vectors of the reflected waves A, B, C and D corresponds to the phase delay amount of the internal reflected wave relative to the excited wave. As shown in FIG. 6(B), the phase of the vector obtained by synthesizing the vectors of the internal reflected waves A, B, C and D is 179.99° . This value indicates that the phase is substantially an opposition to the phase of the excited wave. In other words, oscillation propagates to the right in the figure.

[0098] Referring then to FIGS. 6(C) and 6(D), the relationship between the reflected wave that advances to the right in the figures and the excited wave will be described.

[0099] Suppose that P2 represents any randomly-selected excitation point at which the surface acoustic wave is excited, E represents a reflected wave reflected from one EE of the edges of an electrode finger of a width $(3\lambda/16)$ closest to the excitation point, and F represents a reflected wave reflected from the other edge EF of the electrode finger. Further, suppose that G represents a wave from the excitation point as a reference point, which is passed through the electrode finger closest to the excitation point, and reflected from one EG of the edges of an electrode finger of a width of $\lambda/16$ adjacent to the first-mentioned electrode finger, and H represents a reflected wave reflected from the other edge EH of the second-mentioned electrode finger.

[0100] Concerning the reflected wave E, a phase delay element equal to a distance of $(\lambda/16) \times 2$ with respect to the phase of the excited wave at the excitation point P2 occurs, and hence a phase delay of 45° occurs with respect to the phase of the excited wave.

[0101] Further, concerning the reflected wave F, a phase delay element equal to a distance of $((1/16) \times 2 + (0.1535 \times 2)) \lambda$ with respect to the phase of the excited wave at the excitation point P2 occurs, and phase inversion occurs at the edge EF. Accordingly, a phase delay of 335.52° occurs with respect to the phase of the excited wave.

[0102] Concerning the reflected wave G, a phase delay element equal to a distance of $((1/16) \times 2 + 0.1535 \times 2 + 0.159 \times 2) \lambda$ with respect to the phase of the excited wave at the excitation point P2 occurs, and hence a phase delay of 270° occurs with respect to the phase of the excited wave.

[0103] Concerning the reflected wave H, a phase delay element equal to a distance of $((1/16) \times 2 + 0.1535 \times 2 + 0.159 \times 2 + (1/16) \times 2) \lambda$ with respect to the phase of the excited wave at the excitation point P2 occurs, and phase inversion occurs at the edge EH. Accordingly, a phase delay of 135° occurs with respect to the phase of the excited wave.

[0104] The result of synthesizing the vectors of the reflected waves E, F, G and H corresponds to the phase delay amount of the internal reflected wave relative to the excited wave. As shown in FIG. 6(D), the phase of the vector obtained by synthesizing the vectors of the internal reflected waves E, F, G and H is 0.001° . This value indicates that the phase is substantially equal to that of the excited wave.

[0105] As is understood from the vector characteristics shown in FIGS. 6(B) and 6(D), the direction of the synthesized vector falls within the range of $\pm 0.001^\circ$ with respect to the ideal propagation direction of the surface acoustic wave (the right direction in the figures).

[0106] This invention, however, is not limited to the above-mentioned values.

[0107] In the above embodiment, the position of that one of each pair of electrode fingers, which has a width of $\lambda/16$, is fixed, the other electrode finger is set to have a width of 0.1535λ , and the interval between these electrode fingers is set at 0.159λ . As a result, the direction of the synthesized vector of the reflected waves falls within the range of $\pm 0.001^\circ$ with respect to the ideal direction of propagation of the surface acoustic wave.

[0108] However, a sufficient effect can be obtained even if the direction of the synthesized vector of the reflected waves falls within the range of $\pm 5^\circ$ with respect to the ideal direction of propagation of the surface acoustic wave.

[0109] In this case, it is sufficient if the electrode finger with the width of $\lambda/16$ is fixed, and the width of the wider-width electrode finger is set at a value falling within the range of $0.1535 \lambda \pm 0.007\lambda$. The position of each edge of electrode fingers located outside the pair of electrode fingers is fixed.

[0110] FIG. 7 shows measurement results concerning the transfer characteristic and the group delay characteristic of the above-described surface acoustic wave apparatus, obtained by matching the surface acoustic wave apparatus with an external circuit as in the previous embodiment. As is understood from this characteristic figure, both the transfer characteristic and the group delay characteristic are substantially symmetrical with respect to the fundamental frequency f_0 .

[0111] Although, in each of the above embodiments, the wide-width electrode fingers and the narrow-width electrode fingers are alternately arranged, the arrangement may be changed in a part of the transducer (for example, wide-width electrode fingers may be adjacent to each other). This structure enables the excited wave and the reflected wave to be weighted in accordance with the required characteristics.

[0112] The above-described surface acoustic wave apparatus of the invention shows a much better transmission function characteristic in its signal passing band, and a low insertion loss.

Industrial Applicability

[0113] The surface acoustic wave apparatus of the present invention is mainly used as an intermediate frequency filter for use in electronic devices. The electronic devices include a television set, a communication device, and a cellular phone (of, for example, the CDMA system), etc. The surface acoustic wave apparatus of the invention is characterized in that it is compact and lightweight, and this feature can be utilized to the full if it is installed in a cellular phone.

Claims

1. A surface acoustic wave apparatus equipped with an interdigital transducer that includes first and second common electrodes formed parallel on a piezoelectric substrate, a first split electrode group connected to the first common electrode and extending toward the second common electrode, and a second split electrode group connected to the second common electrode and extending toward the first common electrode; **characterized in that:**

a plurality of pairs of electrode fingers that constitute the first split electrode group, and a plurality of pairs of electrode fingers that constitute the second split electrode group are interleaved at a cycle of $\lambda/2$;

each pair of electrode fingers consist of a narrow-width electrode finger narrower than $\lambda/8$ (λ indicates a wavelength of a surface acoustic wave serving as an operation central frequency), and a wide-width electrode finger wider than $\lambda/8$; and

a synthesized vector, obtained by synthesizing vectors of waves reflected from electrode fingers that are included within a distance of $\lambda/2$ from any randomly-selected excitation point in a surface wave propagation direction, has a phase ϕ expressed by $n\pi - 5^\circ \leq \phi \leq n\pi + 5^\circ$ (n : a natural number) with respect to a phase of a wave excited by the interdigital transducer.

2. The surface acoustic wave apparatus according to claim 1, **characterized in that** a distance (t_1) between centers of a randomly-selected electrode finger and one of the electrode fingers located at the opposite sides of the randomly-selected electrode finger, differs from a distance (t_2) between centers of the randomly-selected electrode finger and the other of the electrode fingers located at the opposite sides of the randomly-selected electrode finger.

3. The surface acoustic wave apparatus according to claim 1, **characterized in that** said each pair of electrode fingers consist of a narrow-width electrode finger having a width of $\lambda/16$, and a wide-width electrode finger having a width w of $0.1465 \lambda \leq w \leq 0.1605 \lambda$.

4. The surface acoustic wave apparatus according to claim 2, **characterized in that** the narrow-width electrode fingers and the wide-width electrode fingers are arranged alternately, the different distances t_1 and t_2 appear alternately, t_1 is a positive deviation from a reference value ($\lambda/4$), and t_2 is a negative deviation from the reference value ($\lambda/4$).

5. The surface acoustic wave apparatus according to claim 2, **characterized in that** a sum of widths of said each pair of electrode fingers is $\lambda/4$.

6. The surface acoustic wave apparatus according to claim 5, **characterized in that** one of said each pair of electrode fingers has a width of $\lambda/16$, and the other of said each pair of electrode fingers has a width of $3\lambda/16$.

7. The surface acoustic wave apparatus according to claim 5, **characterized in that** supposing that the width of one of said each pair of electrode fingers is w , the width of the other of said each pair of electrode fingers is $(\lambda/4) - w$, and a distance between centers of these electrode fingers is x_1 , x_1 is set at a value that substantially satisfies the following equation:

$$\tan \{k(x_1 - (\lambda/8))\} = 1/(\cos \{k((3\lambda/4) + 2w)\})$$

(k represents the number of waves; $k = 2\pi/\lambda$)

8. The surface acoustic wave apparatus according to claim 5, **characterized in that** the width of one of said each pair of electrode fingers is $\lambda/16$, the width of the other of said each pair of electrode fingers is $3\lambda/16$, and a distance x_2 between centers of these electrode fingers is set at a value that substantially satisfies the following equation:

$$\tan \{k(x_2 - \lambda/8)\} = \sqrt{2}$$

9. A surface acoustic wave apparatus equipped with an interdigital transducer that includes first and second common electrodes formed parallel on a piezoelectric substrate, a first split electrode group connected to the first common electrode and extending toward the second common electrode, and a second split electrode group connected to the second common electrode and extending toward the first common electrode; **characterized in that:**

a plurality of pairs of electrode fingers that constitute the first split electrode group, and a plurality of pairs of electrode fingers that constitute the second split electrode group are interleaved;
 each pair of electrode fingers consist of a narrow-width electrode finger narrower than $\lambda/8$ (λ indicates a wavelength of a surface acoustic wave serving as an operation central frequency), and a wide-width electrode finger wider than $\lambda/8$;
 a sum of the widths of the narrow-width electrode finger and the wide-width electrode finger is lower than $\lambda/4$; and
 a sum of the widths of the narrow-width electrode finger and the wide-width electrode finger and a distance between adjacent edges of these electrode fingers is $3\lambda/8$.

10. The surface acoustic wave apparatus according to claim 9, **characterized in that** the narrow-width electrode finger has a width of $\lambda/16$.


11. The surface acoustic wave apparatus according to claim 9, **characterized in that** supposing that one of said each pair of electrode fingers is w_1 , and the width of the other of said each pair of electrode fingers is w_2 , w_1 and w_2 are set at values that substantially satisfy the following equation:

$$\cos(k \cdot 2w_2) + \sin(k \cdot 2w_2) = 2 - \cos(k \cdot 2w_1) - \sin(k \cdot 2w_1)$$

(k represents the number of waves; $k = 2\pi/\lambda$)

12. The surface acoustic wave apparatus according to claim 10, **characterized in that** one of said each pair of electrode fingers has a width of $\lambda/16$, and the other of said each pair of electrode fingers has a width of 0.1535λ .


PHASE OF VECTOR OBTAINED BY
SYNTHESIZING VECTORS OF
REFLECTED WAVES (175.5°)

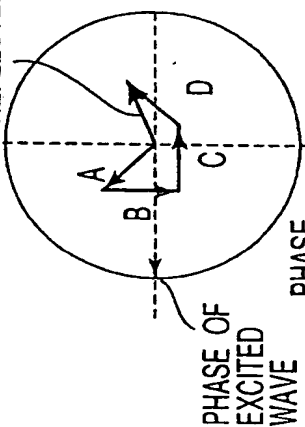

PHASE OF EACH
REFLECTED WAVE
A~D; PHASE OF SYNTHESIZED
VECTOR 175.5

FIG. 1B

PHASE OF VECTOR OBTAINED BY
SYNTHESIZING VECTORS OF
REFLECTED WAVES (22.5°)

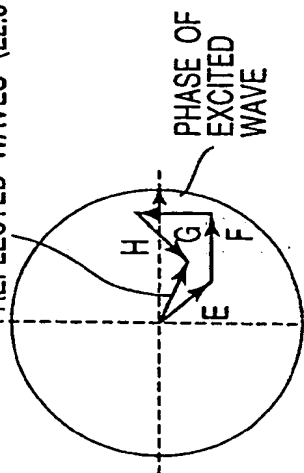

PHASE OF EACH
REFLECTED WAVE
E~H; PHASE OF SYNTHESIZED
VECTOR 22.5

FIG. 1D

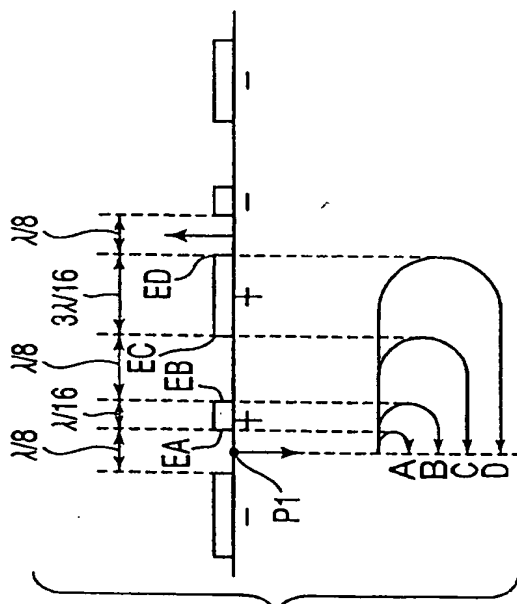


FIG. 1A

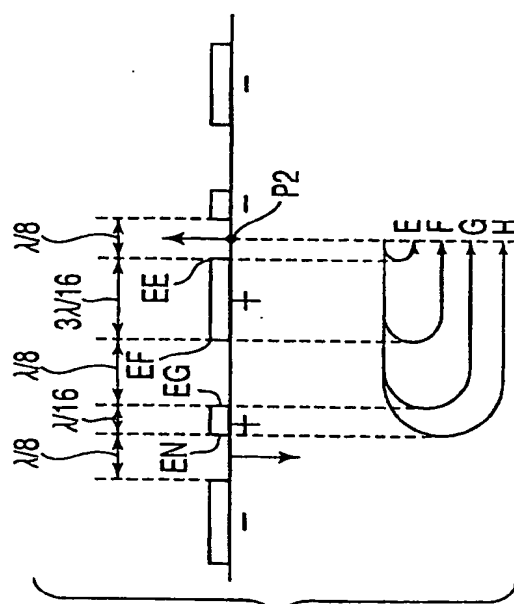


FIG. 1C

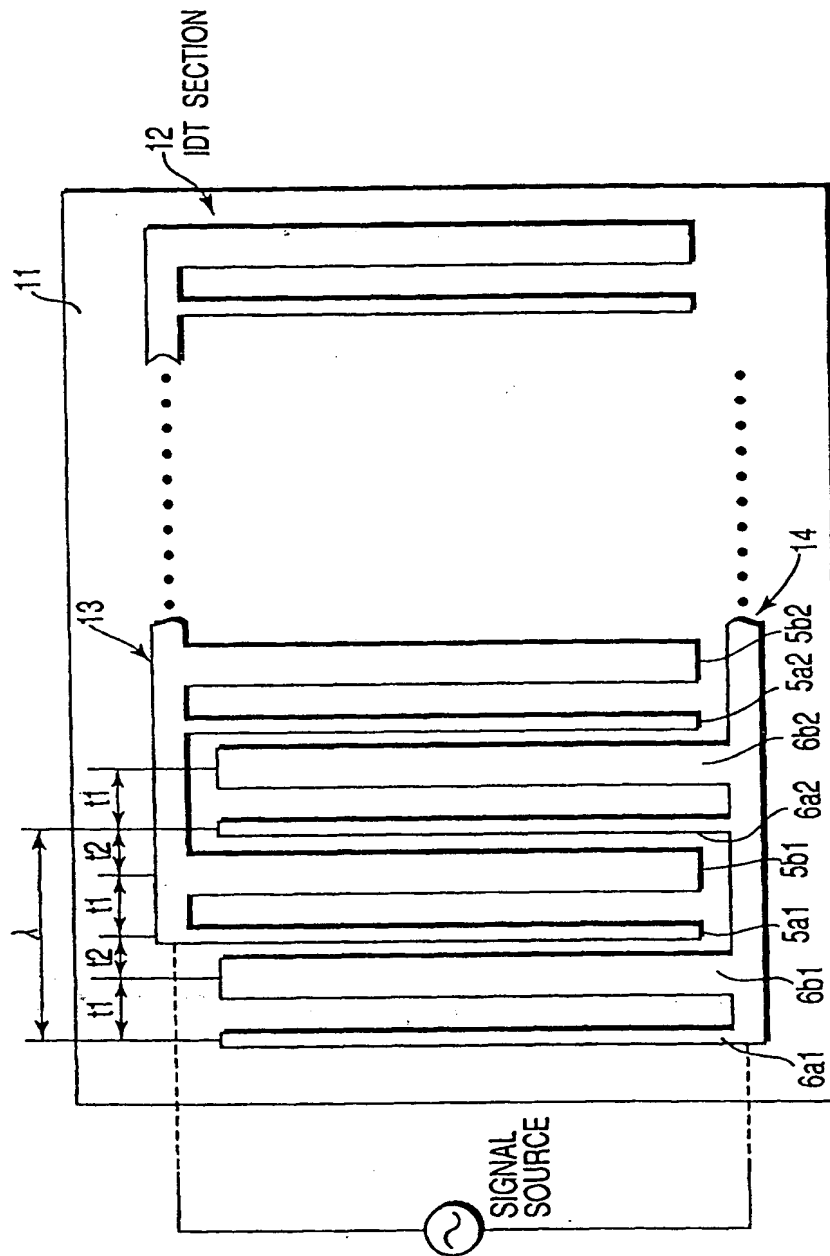
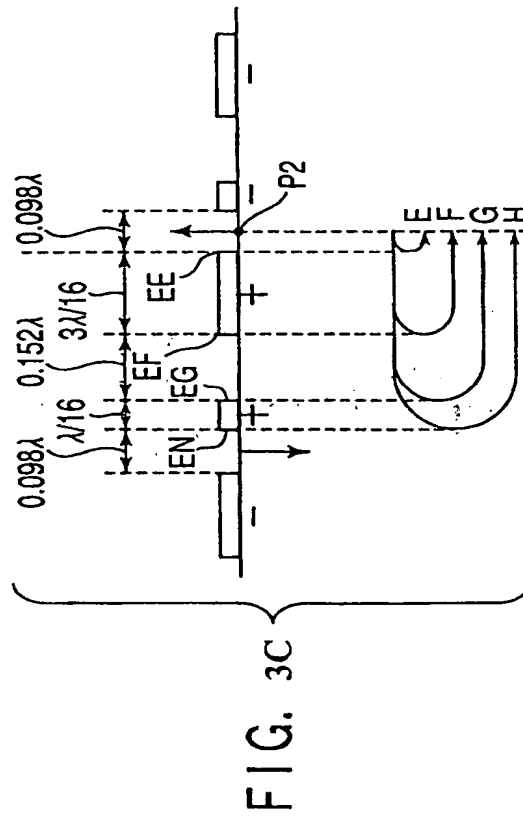
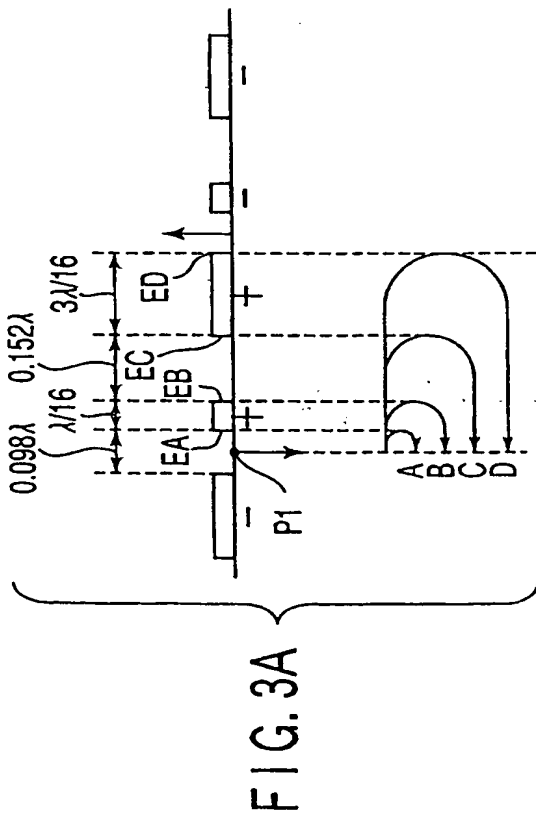
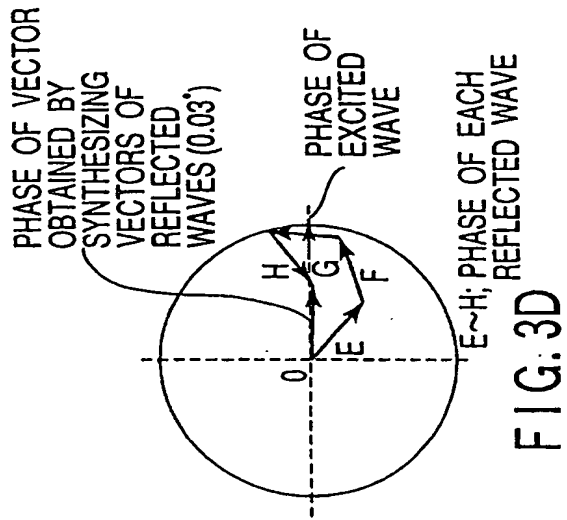
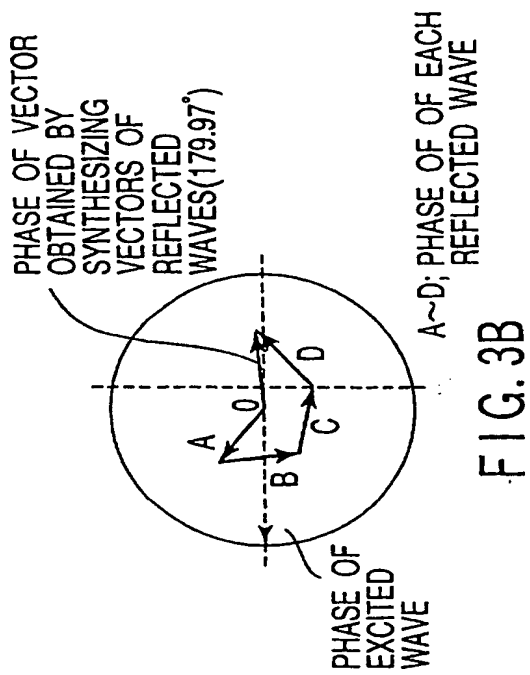


FIG. 2



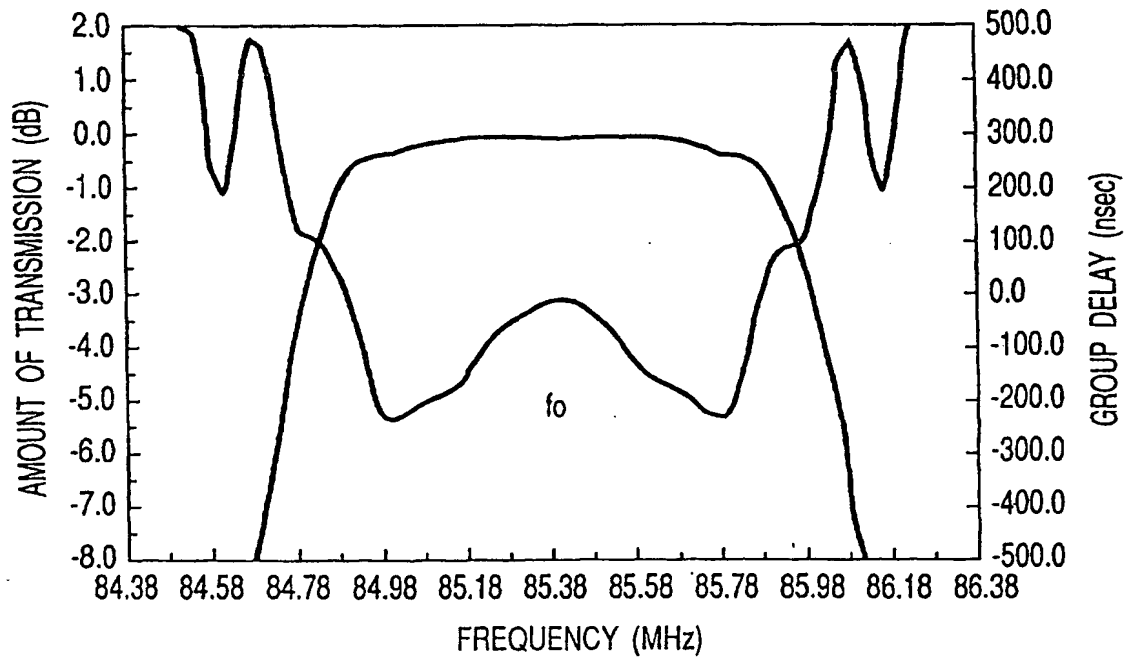


FIG. 4A

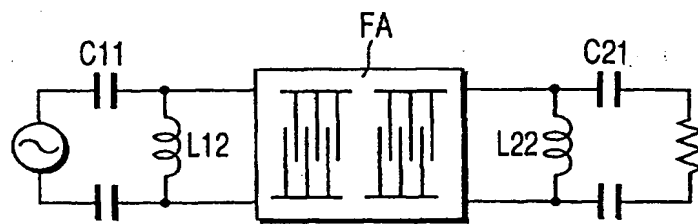


FIG. 4B

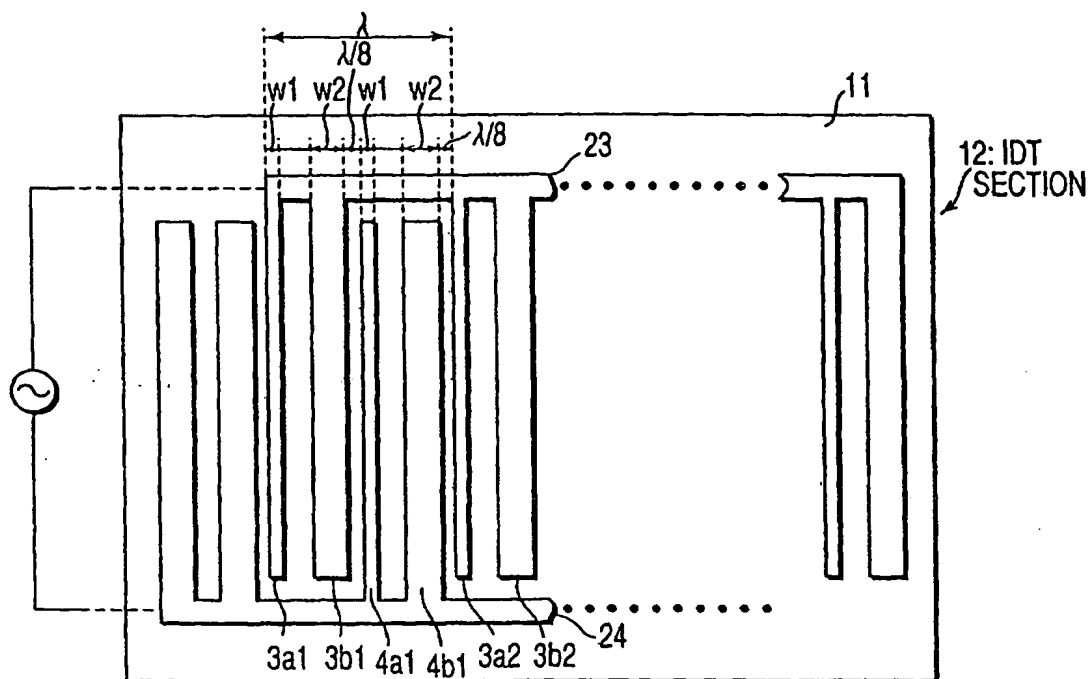


FIG. 5





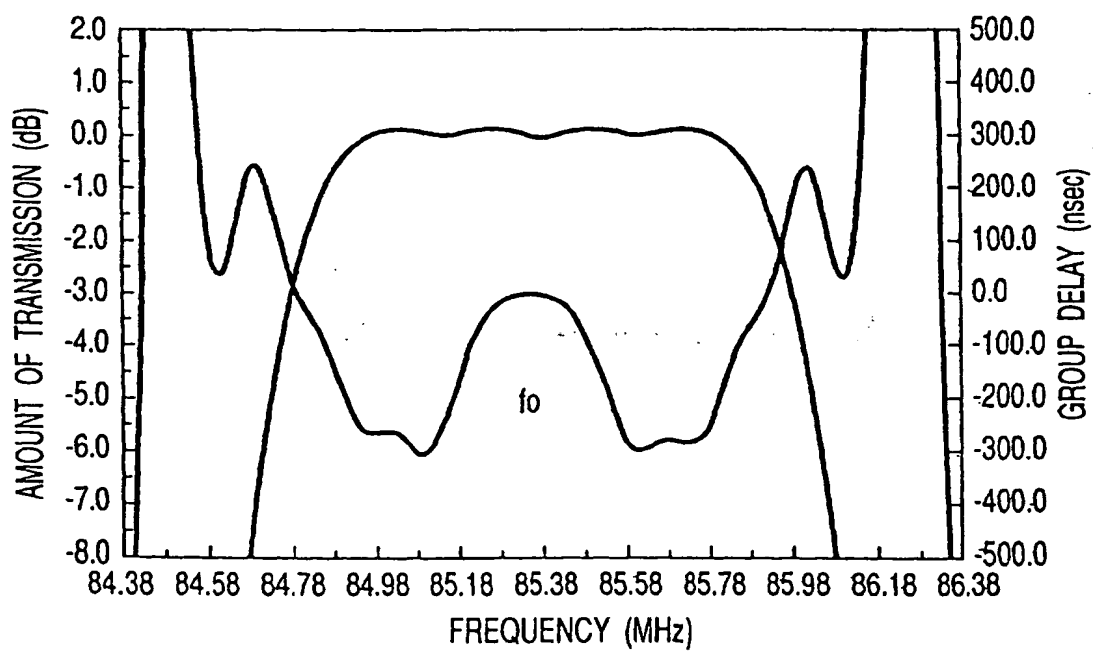


FIG. 7

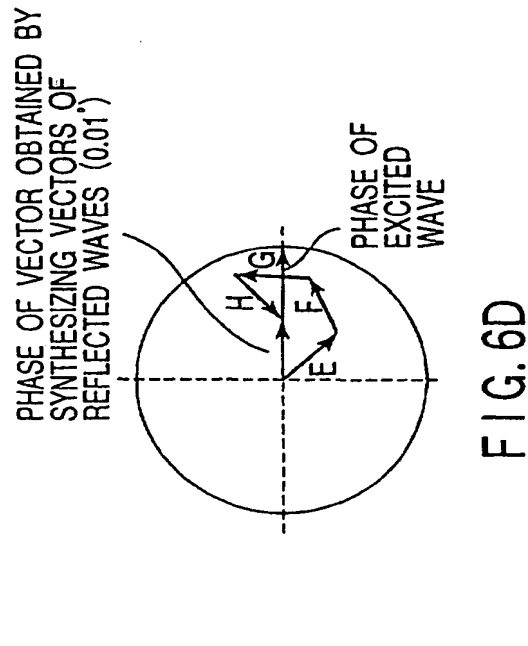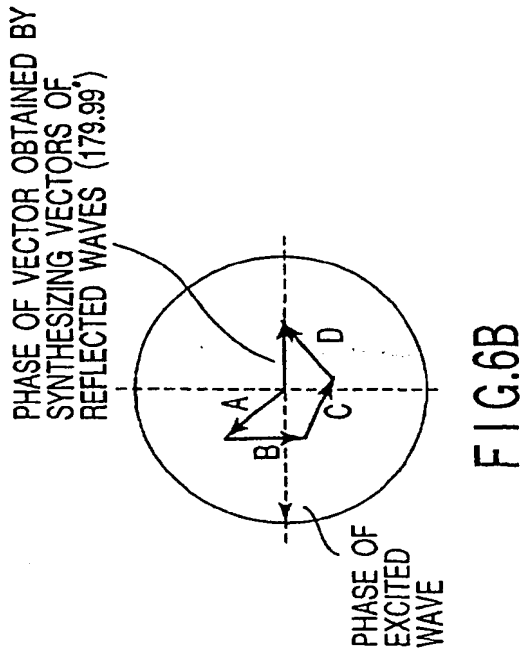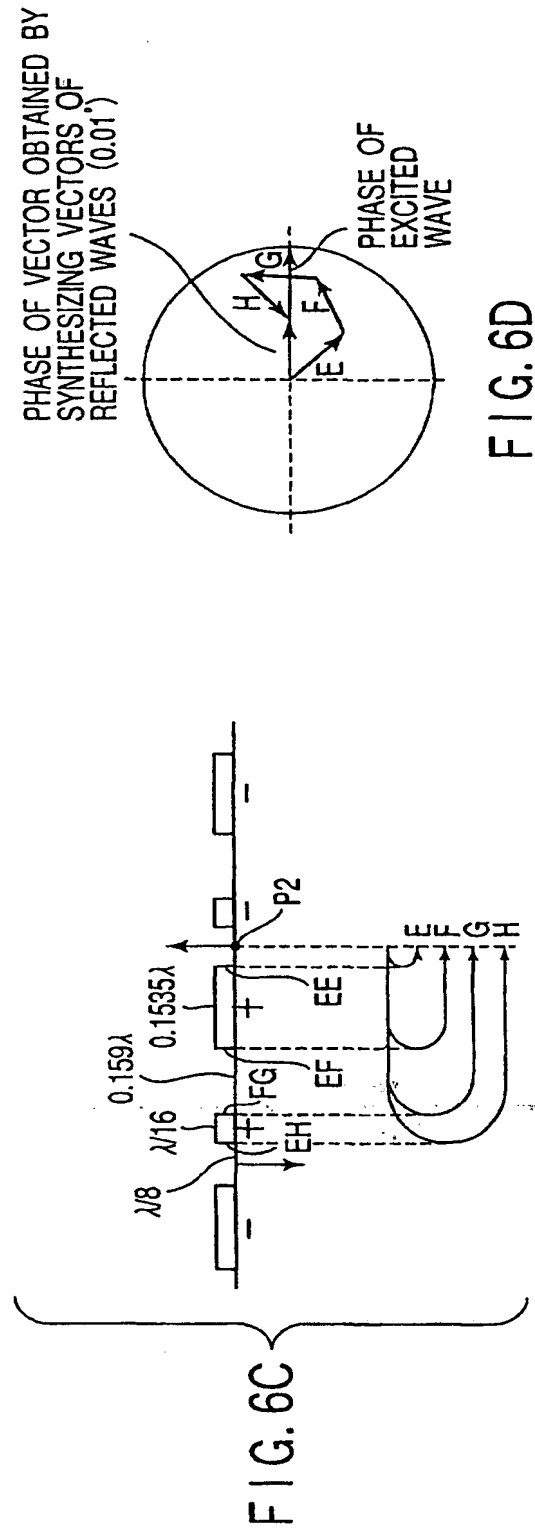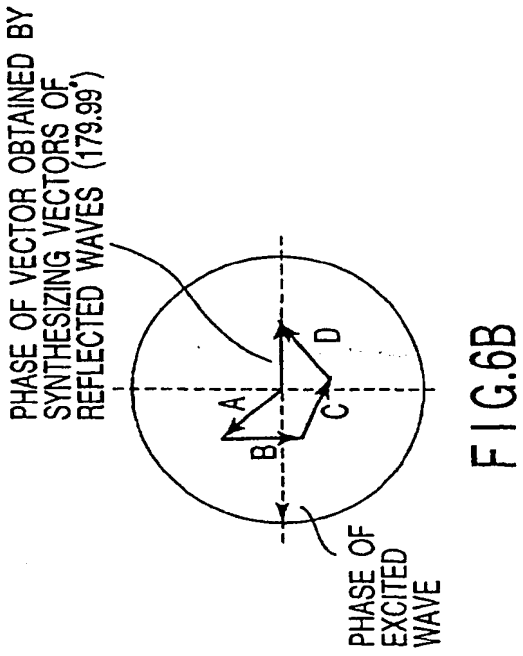

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP00/06703

| A. CLASSIFICATION OF SUBJECT MATTER Int.Cl. ⁷ H03H9/145 | | |
|---|---|--|
| According to International Patent Classification (IPC) or to both national classification and IPC | | |
| B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) Int.Cl. ⁷ H03H9/145 | | |
| Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-2000 Toroku Jitsuyo Shinan Koho 1994-2000 Kokai Jitsuyo Shinan Koho 1971-2000 Jitsuyo Shinan Toroku Koho 1996-2000 | | |
| Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Delphion Intellectual Property Network (IPN) | | |
| C. DOCUMENTS CONSIDERED TO BE RELEVANT | | |
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| X A | US, 4162465, A (University of Illinois Foundation), 24 July, 1979 (24.07.79) (Family: none) Column 5; lines 33 to 39 Full text; all drawings | I 2-12 |
| <input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex. | | |
| * Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family | | |
| Date of the actual completion of the international search 24 October, 2000 (24.10.00) | | Date of mailing of the international search report 07 November, 2000 (07.11.00) |
| Name and mailing address of the ISA/ Japanese Patent Office | | Authorized officer |
| Facsimile No. | | Telephone No. |

Form PCT/ISA/210 (second sheet) (July 1992)

